

PREFRAME #3

DIVISION 10.11.00 – VISUAL DISPLAY UNITS

The Preframe #3 delivers exceptional durability and clean lines as our most cost-effective factory framed unit. Locally manufactured and assembled using time-tested techniques to ensure reliable, long-lasting performance in high-traffic environments.

FAST • RELIABLE • CUSTOM

- ❖ SBE Certified (Small Business Enterprise)
- ❖ MBE Certified (Minority Business Enterprise)
- ❖ BABA Compliant (Build America, Buy America)

1. PRODUCT & MATERIALS

GENERAL: Provide for markerboards and tackboards, Neal PREFRAME #3 factory-trimmed units, as manufactured by W. E. Neal Slate Co. Provide all necessary fasteners and adhesives for a complete, secure, and plumb installation.

ALUMINUM EXTRUSIONS: Extrusions shall have a dull-etched (satin) anodized finish, AA C22-A31. Minimum average section thickness of extrusions: tray, 3/32", all other sections, 1/16". All extrusions are engineered for maximum rigidity and clean visual sightlines.

PANELS: Markerboard and Tackboard panels shall be manufactured per the specific project requirements and finishes selected from the Architect's Specifier Guide.


2. EXECUTION

INSTALLATION: Fasten angle clips securely to wall with approved fasteners, 24" on centers, top and bottom. Set boards in place and attach with angle-clips. Coordinate with general contractor to ensure continuous in-wall blocking is provided prior to installation.


3. ACCESSORIES (SPECIFY QTY)

- Map Hooks/Map Winders
- Flag Holders
- Grip Strips

Optional Trim Shapes

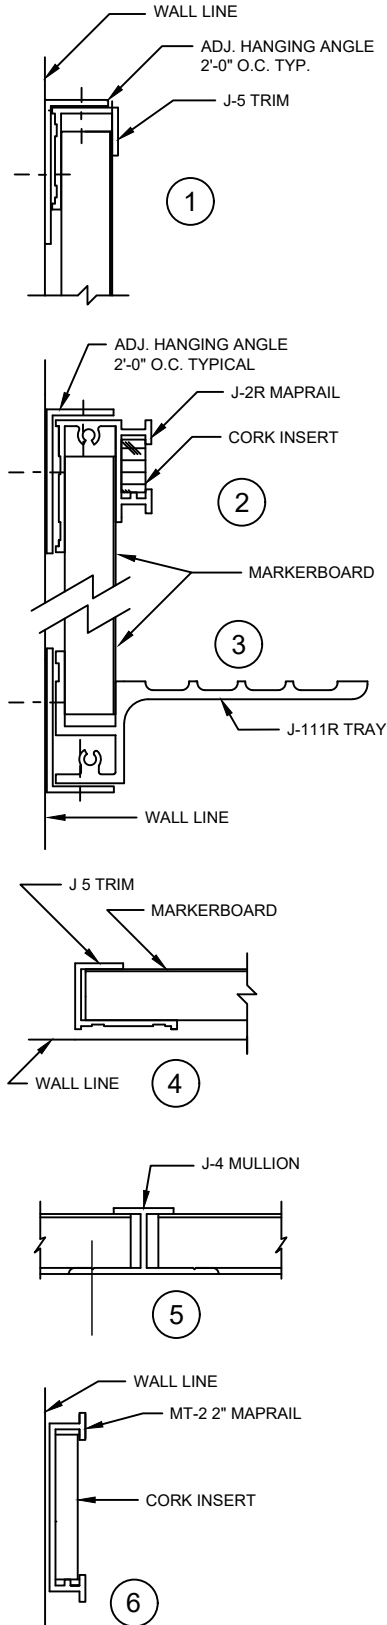

*Elevations indicated below are not to scale and are for the purpose of showing common trim locations.

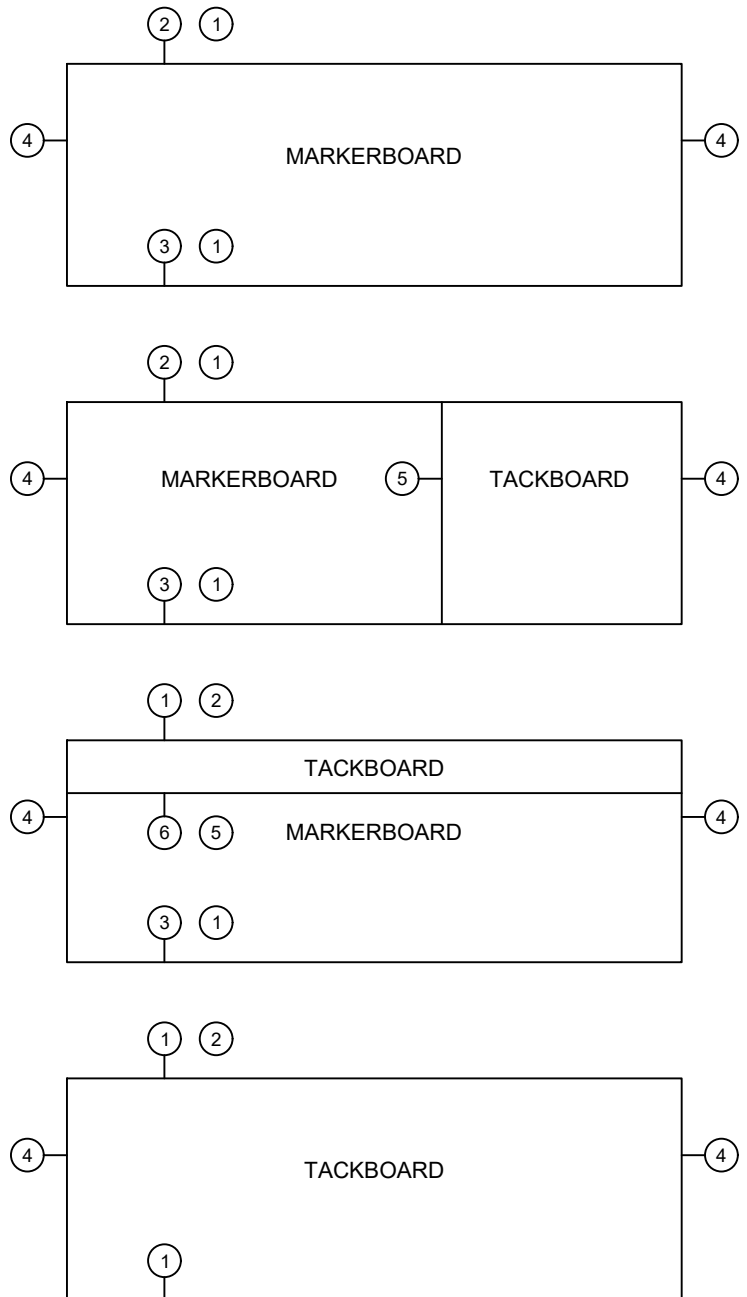

SCALE 1:2